


FIRST TRIO

Datasheet

FIRST TRIO is a tilting downlight that comes in a classic, triple square design. The high-performing luminaire offers flexibility in lighting design and can be used either as general lighting or for creating accent lighting.

Color	Beam Angle	CCT	System flux	System power	Other technical characteristics
●	10°	3000K	3 x 3090lm (3000K)	3 x 25,4W (650mA)	
●	24°	4000K	3 x 3265lm (4000K)		
○	30°				
	50°				

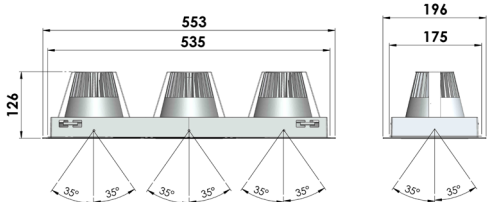

Color Rendering:
CRI > 90

Material:
Die-cast aluminium

Lifetime:
50.000 hours L80B10

Color consistency:
MacAdams 2 SDCM

Guarantee:
5 years (LED Chip & driver)

Installation:
Spring mounted, no tools required

Cut out Ø:
180 x 530 mm

LED chip:
Citizen

Protection:
IP20

Dimmable:
Available with CASAMBI dimming, DALI

Certifications:
CE