



SECUR 816

Datasheet

Industrial style pendant luminaire made of die-cast aluminium, available with 3 housing color options and a wide range of light sources for an effortless installation. It comes with a 3m cable and is optimal for all applications, from cafeterias to food displays; longer cable lengths are available upon request.




MOUNT
UP TO 7M

HIGH
EFFICIENCY

Color	Beam Angle	CCT	System flux	System power
●	10°	2700K	4736lm (3000K)	41,8W (1050mA)
●	30°	3000K	5030lm (4000K)	
○	50°	3500K		
		4000K		

Other technical characteristics

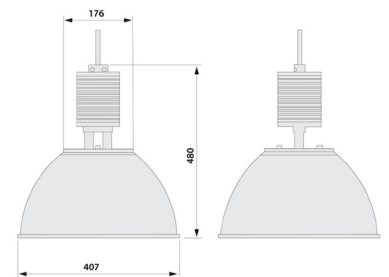

Color Rendering:
CRI > 90

Shade material:
Clear acrylic prismatic
Aluminium

Material:
Die-cast aluminium

Lifetime:
50.000 hours L80B10

Color consistency:
MacAdams 2 SDCM

Guarantee:
5 years (LED Chip & driver)

Installation:
Suspended with power cable (3-5m)

LED chip:
Philips

Protection:
IP20

Dimmable:
Fixed output, DALI

Certifications:
CE